


Jewellery Lighting




CRI
> 80

IP
20



CODE: GLC101-R

LED:	OSRAM OSOLON
CCT:	3000K 4000K 6000K
Input:	AC220-240V 50/60Hz 1.3W
Output:	DC3V 300mA 0.9W
MRP ₹:	




CODE: GLC101-SQ

LED:	OSRAM OSOLON
CCT:	3000K 4000K 6000K
Input:	AC220-240V 50/60Hz 1.3W
Output:	DC3V 300mA 0.9W
MRP ₹:	



CRI
> 80


IP
20

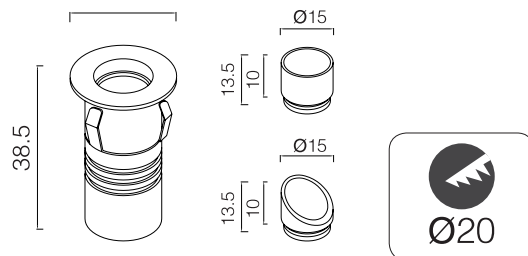

CODE: GLC102-R

LED:	OSRAM OSLON
CCT:	3000K 4000K 6000K
Angle:	15° 30° 45°
Input:	AC220-240V 50/60Hz 1.3W
Output:	DC3V 300mA 0.9W

MRP ₹:

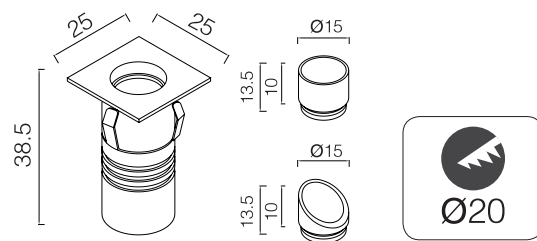

CODE: GLC102-SQ


LED:	OSRAM OSLON
CCT:	3000K 4000K 6000K
Angle:	15° 30° 45°
Input:	AC220-240V 50/60Hz 1.3W
Output:	DC3V 300mA 0.9W

MRP ₹:




CRI
> 80

IP
20



CODE: GLC103-R

LED:	OSRAM OSOLON
CCT:	3000K 4000K 6000K
Angle:	110°
Input:	AC220-240V 50/60Hz 1.3W
Output:	DC3V 300mA 0.9W
MRP ₹:	




CODE: GLC103-S

LED:	OSRAM OSOLON
CCT:	3000K 4000K 6000K
Angle:	110°
Input:	AC220-240V 50/60Hz 1.3W
Output:	DC3V 300mA 0.9W
MRP ₹:	



CRI
> 80


IP
20



CODE: GLC104-R

LED:	OSRAM OSLON
CCT:	3000K 4000K 6000K
Input:	AC220-240V 50/60Hz 1.3W
Output:	DC3V 300mA 0.9W


MRP ₹:



CODE: GLC104-S

LED:	OSRAM OSLON
CCT:	3000K 4000K 6000K
Input:	AC220-240V 50/60Hz 1.3W
Output:	DC3V 300mA 0.9W

MRP ₹:



CODE: GLC105

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø45mm
PowerConsumption	3W
LuminousFlux	350lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/ current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	1year

MRP ₹:



IP20




CODE: GLC107

LED:	EDISON 1*1w
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	30°
Luminous:	90lm
Input:	AC110-240V 50/60Hz
External constant current driver	
MRP ₹:	



IP20

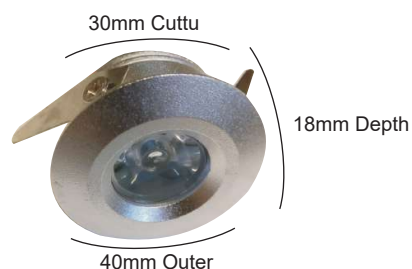

CODE: GLC108

LED:	EDISON 1*1w
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	30°
Luminous:	90lm
Input:	AC110-240V 50/60Hz
External constant current driver	
MRP ₹:	



CODE: GLC109

LED:	EDISON 1*1w
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	30°
Luminous:	90lm
Input:	AC110-240V 50/60Hz
External constant current driver	
MRP ₹:	



IP20



CODE: GLC110

LED:	EDISON 1*1w
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	30°
Luminous:	90lm
Input:	AC110-240V 50/60Hz
External constant current driver	
MRP ₹:	



IP20



CODE: GLC111

LED: EDISON 1*1w
 CRI: > 80
 CCT: 3000K 4000K 6000K
 Angle: 25°
 Luminous: 65lm
 Input: AC110-240V 50/60Hz
 External constant current driver
 MRP ₹:




CODE: GLC112

LED: EDISON 1*1w
 CRI: > 80
 CCT: 3000K 4000K 6000K
 Angle: 20°
 Luminous: 35lm
 Input: AC110-240V 50/60Hz
 External constant current driver
 MRP ₹:




IP20

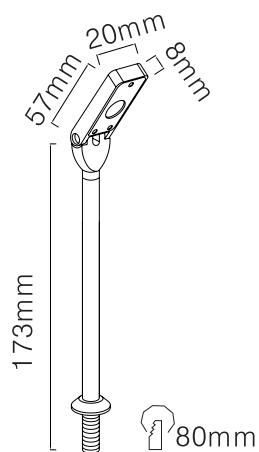

CODE: GLC113

LED:	OSRAM 1*1W
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	40°
Luminous:	90lm
Input:	AC110-240V 50/60Hz
External constant current driver	

MRP ₹:

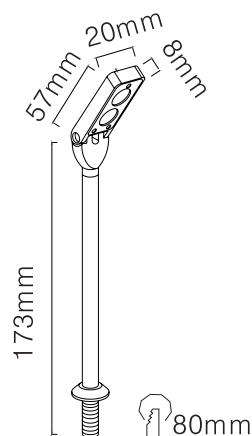

CODE: GLC114

LED:	OSRAM 2*1W
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	40°
Luminous:	180lm
Input:	AC110-240V 50/60Hz
External constant current driver	

MRP ₹:



IP20



CODE: GLC115

LED:	CREE 1*1w
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	30°
Luminous:	90lm
Input:	AC110-240V 50/60Hz
External constant current driver	
MRP ₹:	




CODE: GLC116

LED:	CREE 3*1w
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	30°
Luminous:	90lm
Input:	AC110-240V 50/60Hz
External constant current driver	
MRP ₹:	



IP20



CODE: GLC117

LED: EDISON 3*1w

CRI: > 80

CCT: 3000K 4000K 6000K


Angle: 30°

Luminous: 270lm

Input: AC110-240V 50/60Hz

External constant current driver

MRP ₹:



CODE: GLC118

LED: EDISON 1*1w

CRI: > 80

CCT: 3000K 4000K 6000K

Angle: 30°

Luminous: 90lm

Input: AC110-240V 50/60Hz

External constant current driver

MRP ₹:



IP20



CODE: GLC119

LED: EDISON 1*1w

CRI: > 80

CCT: 3000K 4000K 6000K

Angle: 30°

Luminous: 90lm

Input: AC110-240V 50/60Hz

External constant current driver

MRP ₹:



CODE: GLC120

LED: EDISON 1*1w

CRI: > 80

CCT: 3000K 4000K 6000K

Angle: 30°

Luminous: 90lm

Input: AC110-240V 50/60Hz

External constant current driver

MRP ₹:



IP20




CODE: GLC121

LED:	EDISON 1*1w
CRI:	> 80
CCT:	3000K 4000K 6000K
Angle:	30°
Luminous:	90lm
Input:	AC110-240V 50/60Hz
External constant current driver	
MRP ₹:	



IP20



CODE: GLC122

LED: EDISON 3*1w

CRI: > 80

CCT: 3000K 4000K 6000K

Angle: 30°

Luminous: 180lm

Input: AC110-240V 50/60Hz

External constant current driver

MRP ₹:



CODE: GLC123

LED: EDISON 1*1w

CRI: > 80

CCT: 3000K 4000K 6000K


Angle: 30°

Luminous: 90lm

Input: AC110-240V 50/60Hz


External constant current driver

MRP ₹:

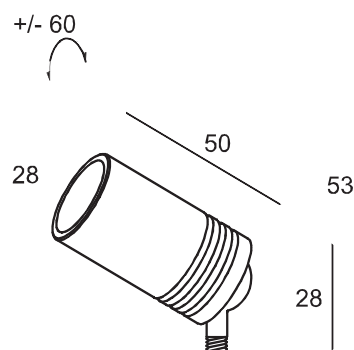


CODE: GLC124

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	1years
Patent No.	
Certification	
MRP ₹:	

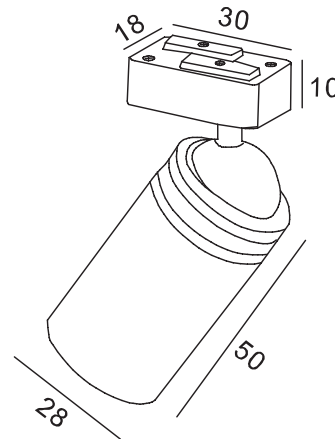

CODE: GLC125

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
PowerConsumption	3.5W
LuminousFlux	350lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	12V or 24V DC
HousingMaterial	DieCast Aluminum
MRP ₹:	




CODE: GLC126

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
MRP ₹:	




CODE: GLC127

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
PowerConsumption	9W
LuminousFlux	900lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	20V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	1year
MRP ₹:	

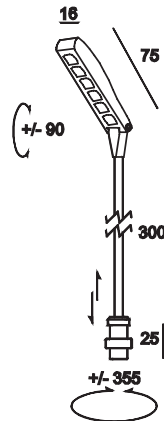


Adjustable Beam Angle 6-60

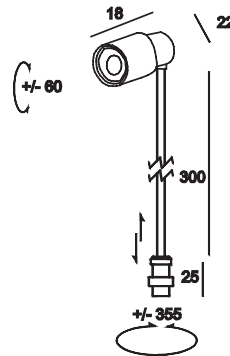


CODE: GLC128

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	
MRP ₹:	

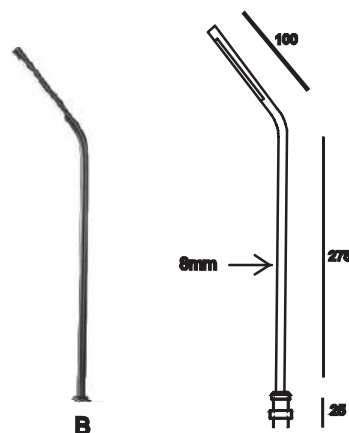

CODE: GLC129

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
PowerConsumption	5W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	15VDC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	1year
MRP ₹:	

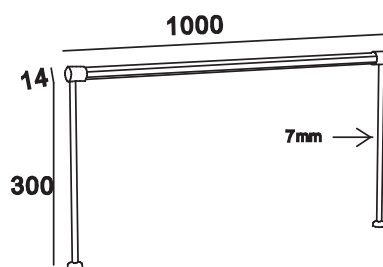

CODE: GLC130

LightSource	Osram LED / Edison
Colour RenderingIndex	> 97
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
PowerConsumption	18W
LuminousFlux	1800lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	24V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	1year
MRP ₹:	

Premium Series led lighting



Girnar Lighting company,
near metro cinemas, Dhobitalao,
Mumbai - 400002, Maharashtra, India.



Girnarlighting_official