



LED STRIP LIGHTS

ECO - SERIES



Eco-Series



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- Energy Efficient.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : SAN'AN LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

2835/120 - 12V/24V

Wattage : 10W /Mtr

Color Temperature : WW NW



8mm PCB

2835/240 - 12V/24V

Wattage : 22W /Mtr

Color Temperature : WW NW



10mm PCB

LED STRIP LIGHTS

PREMIUM - SERIES



Premium-Series



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : BRIDGELUX LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

2835/120 - 12V/24V

Wattage : **12W/Mtr**

Color Temperature : **WW** **NW**



5mm | 2oz PCB

2835/120 - 12V/24V

Wattage : **12W/Mtr**

Color Temperature : **WW** **NW** **WH**



8mm | 2oz PCB

2835/180 - 12V/24V

Wattage : **18W/Mtr**

Color Temperature : **WW** **NW** **WH**



10mm | 3.5oz PCB

2835/240 - 12V/24V

Wattage : **24W/Mtr**

Color Temperature : **WW** **NW** **WH**



10mm | 3.5oz PCB



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : SAN'AN LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series


2835/360 - 24V

Wattage : **36W /Mtr**

Color Temperature : **WW** **NW**



30mm | 30Z PCB

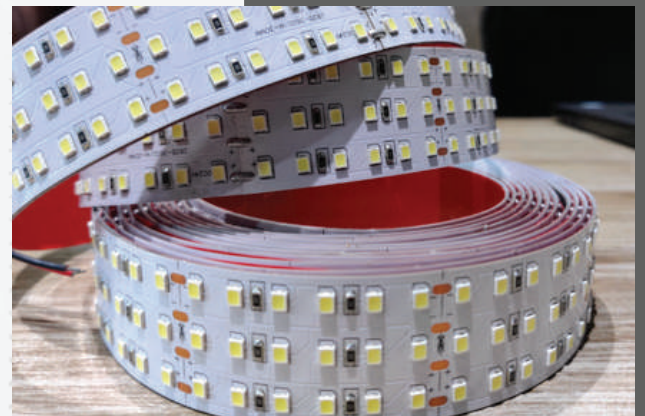



LED STRIP LIGHTS

PREMIUM - SERIES

LOW
WATTAGE



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : BRIDGELUX LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series

2835/120 - 24V

Wattage : 6W / Mtr

Color Temperature : **WW** **NW**

 10mm | 2.50Z PCB



LED STRIP LIGHTS

PREMIUM - SERIES

20 METERS
DROPLESS

ULTRA-LONG LED STRIP LIGHT

ONE END POWERED
20 METERS LENGTH

Beginning

End



Uniform Light



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : SAN'AN LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series

2835/120 - 24V

Wattage : **14W /Mtr**

Color Temperature : **WW** **NW**



10mm | 50Z PCB





LED STRIP LIGHTS

PREMIUM - SERIES

CCT
TUNABLE

Premium-Series

Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : BRIDGELUX LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

2835/180 - 12V

Wattage : **18W/Mtr**

Color Temperature : **CCT**

2835/192 - 24V

Wattage : **20W/Mtr**

Color Temperature : **CCT**

2835/132 - 24V

Wattage : **24W/Mtr**

Color Temperature : **CCT**



10mm | 30z PCB



10mm | 30z PCB



8mm | 30Z PCB
2 in 1 LED



LED STRIP LIGHTS

PREMIUM - SERIES

COLORED



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : BRIDGELUX LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series


2835/120 - 24V

Wattage : 12W /Mtr

Color Temperature :



10mm | 30Z PCB

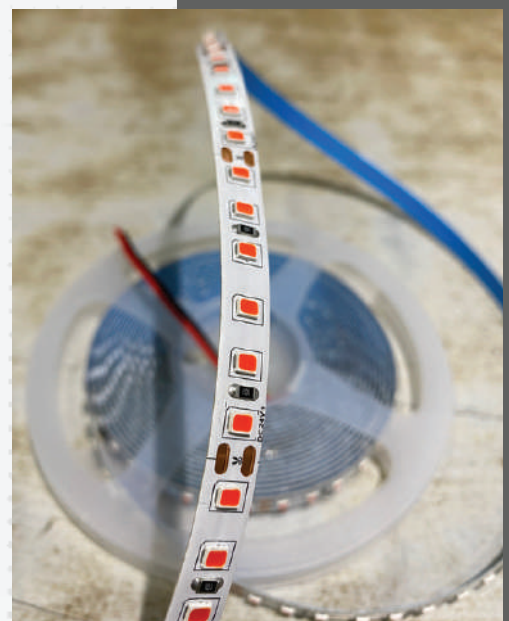



LED STRIP LIGHTS

PREMIUM - SERIES

RGB



Premium-Series

Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

3535/144 - 12V

Wattage : 12W/Mtr

Color Temperature : **RGB**



10mm | 2.5OZ PCB

5050/60 - 24V

Wattage : 12W/Mtr

Color Temperature : **RGB**



10mm | 2.5OZ PCB

5050/72 - 24V

Wattage : 18W/Mtr

Color Temperature : **RGB WW**



10mm | 2.5OZ PCB


5050/48 - 24V

Wattage : 24W/Mtr

Color Temperature : **RGB CCT**



10mm | 2.5OZ PCB

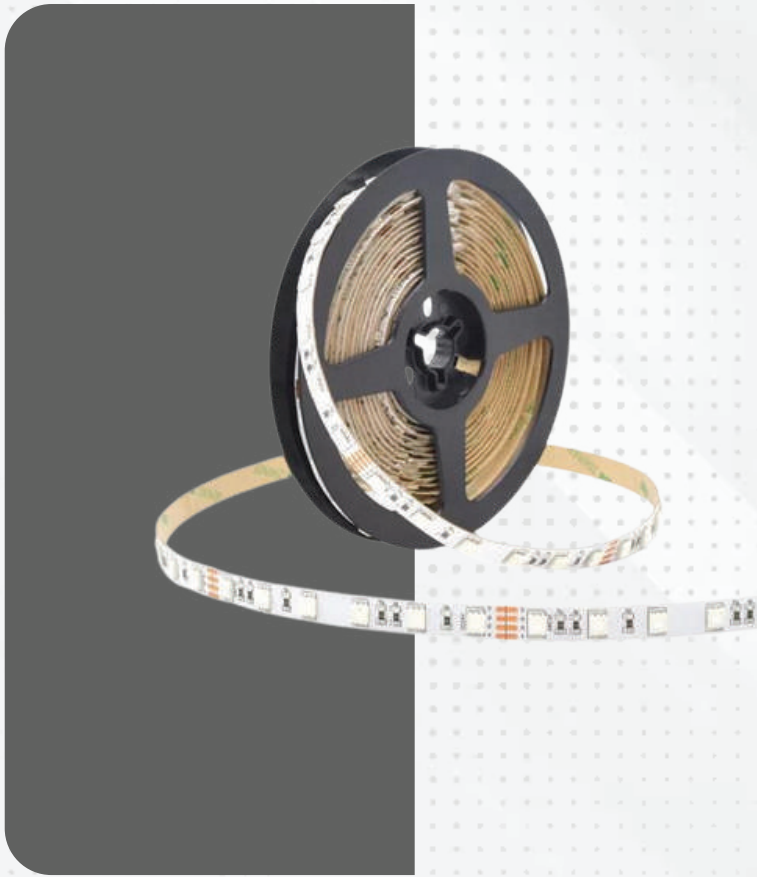

Premium-Series

Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

2835/72 - 24V

Wattage : 14W/Mtr

Color Temperature : **RGB**



5mm PCB

5050/60 - 24V

Wattage : 15W/Mtr

Color Temperature : **RGB WW**



10mm PCB

4 in 1 LED

5050/96 - 24V

Wattage : 18W/Mtr

Color Temperature : **RGB WW**



10mm PCB

4 in 1 LED

5050/60 - 24V

Wattage : 20W/Mtr

Color Temperature : **RGB CCT**



10mm PCB

5 in 1 LED



Features.

- Widely used in household and decorative lighting, etc.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : BRIDGELUX LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series

2835/120 - 24V/16703PB

Wattage : **12W / Mtr**

Color Temperature : **WW** **WH**



10mm PCB



Premium-Series



Features.

- Widely used in household and decorative lighting, Clubs, etc.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

5050/60 - 12V/WS2811

Wattage : 15W/Mtr

Color Temperature : 



10mm PCB

5050/60 - 24V/WS2811

Wattage : 15W/Mtr

Color Temperature : 



10mm PCB



Features.

- Widely used in household and decorative lighting, Clubs, etc.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series


5050/60 - 12V/WS2815

Wattage : 15W / Mtr


Color Temperature : 



5mm PCB

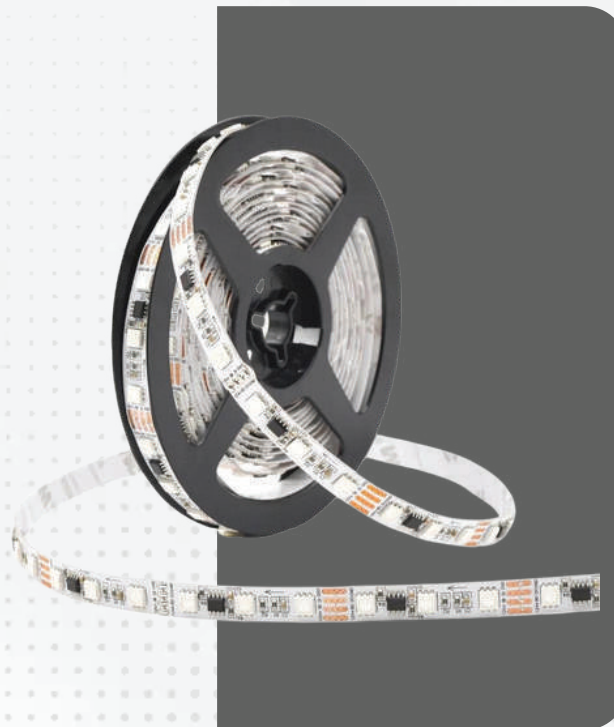

Premium-Series

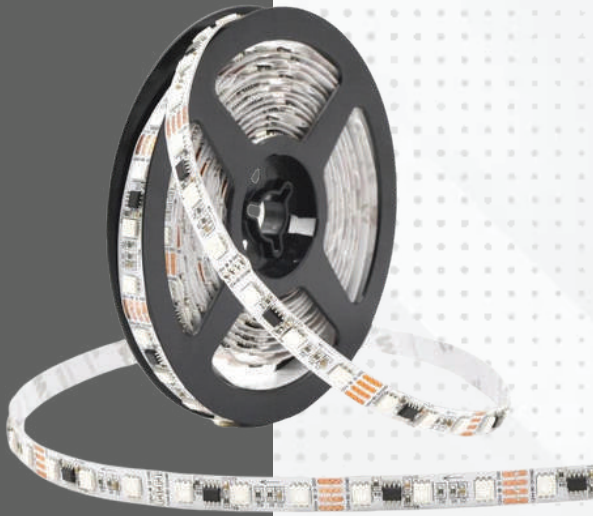

Features.

- Widely used in household and decorative lighting, Clubs, etc.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20 / IP67
- Price ₹ :

2835/120 - 24V/1934

Wattage : 14W /Mtr

Color Temperature : WW NW



8mm PCB

5050/60 - 12V/1934

Wattage : 15W /Mtr

Color Temperature : RGB



10mm PCB

5050/60 - 12V/1934


Wattage : 15W /Mtr

Color Temperature : RGB



IP67 10mm PCB

Premium-Series

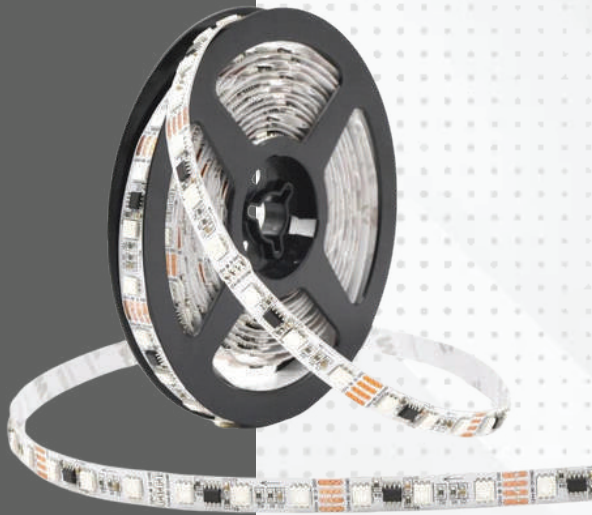

Features.

- Widely used in household and decorative lighting, Clubs, etc.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20 / IP67
- Price ₹ :

5050/60 - 24V/1814

Wattage : 15W /Mtr

Color Temperature : 



10mm PCB

5050/60 - 24V/1814

Wattage : 15W /Mtr

Color Temperature : 



IP67 10mm PCB



LED STRIP LIGHTS

PREMIUM - SERIES

DMX512

Features.

- Widely used in decorative lighting, Clubs, etc.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series

5050/60 - 24V/DMX512AC

Wattage : 18W /Mtr

Color Temperature : **RGB** **WW**



10mm PCB



LED STRIP LIGHTS

PREMIUM - SERIES

WATERPROOF
IP67

Premium-Series



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 120°
- GLC : 2835
- LED Make : BRIDGELUX LED
- Color Rendering Index : 80+
- Luminous Flux : 26-28LM
- IP Rating : IP67
- Price ₹ :

2835/120 - 12V/24V

Wattage : 12W /Mtr

Color Temperature : WW NW WH



10mm | 2OZ PCB

2835/180 - 12V/24V

Wattage : 18W /Mtr

Color Temperature : WW NW WH



10mm | 2OZ PCB

2835/240 - 12V/24V

Wattage : 24W /Mtr

Color Temperature : WW NW WH



12mm | 3.5OZ PCB

LED COB STRIP LIGHTS

PREMIUM-SERIES





Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 180°
- Color Rendering Index : 90+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series

560D - 24V

Wattage : 15W / Mtr

Color Temperature : WW NW



8mm PCB





LED COB STRIP LIGHTS

PREMIUM - SERIES

CCT
TUNABLE



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 180°
- Color Rendering Index : 90+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series

560D - 24V

Wattage : **15W / Mtr**

Color Temperature : **CCT**



8mm PCB





LED COB STRIP LIGHTS

PREMIUM - SERIES

COLORED



Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 180°
- Color Rendering Index : 90+
- Luminous Flux : 26-28LM
- IP Rating : IP20
- Price ₹ :

Premium-Series

560D - 24V

Wattage : 15W / Mtr

Color Temperature :

RED

PURPLE

AMBER



8mm PCB





LED COB STRIP LIGHTS

PREMIUM - SERIES

WATERPROOF
IP65

Features.

- Widely used in office, commercial household and decorative lighting, etc.
- No Soldering Joints, no risk of false soldering and weak soldering.
- Easy to Cut.

Product Data.

- Beam Angle : 180°
- Color Rendering Index : 90+
- Luminous Flux : 26-28LM
- IP Rating : IP65
- Price ₹ :

Premium-Series

560D - 24V

Wattage : 15W/Mtr

Color Temperature : **WW**



10mm PCB





Girnarlighting_official



www.girnarlighting.com

Contact us:

Email : info.girnarlighting@gmail.com

9029931423 / 9619379984

LED STRIP LIGHTS

PREMIUM - SERIES

IC RUNNING /
PIXEL